

# Rack Mount Patch Panel

ODU-L21

## Overview



ODF (Optical Distribution Frame) rack mount patch panel ODU-L21 ultimate new design with the most advanced splice & patch system and cable management ever developed for high density applications on carrier & transmission side.

## Features

- Compact 3U patch panel, each U accommodates 2 fiber trays
- Each U accommodates 2 fiber trays with each max. Capacity of 24 fibers
- Max capacity of the patch panel is 144 fibers for SSF Duplex adapters
- Patch Panels are rear mounted for improved access
- Fiber trays and connected patch cords can slide in and out independently as a pull-out unit
- Easy side access ensures laser safety
- Special splice module design, which allows splicing on one side and professional cable storage on the other side without cable congestion
- Modules are tiltable up to 135 degree for ease of installation and maintenance
- Special incoming cable fixing unit which ensures strong, easy and quick cable fixing for miniflex tubes-no need to use time consuming plastic cable ties
- Integrated outgoing patch cords clamps and routing guides, which ensures min bend radius criteria of 35mm and professional cable management.

## Applications

- Carrier & transmission networks in central offices
- Outside cabinet applications
- FTTX applications
- Utility Networks (WAN&MAN)

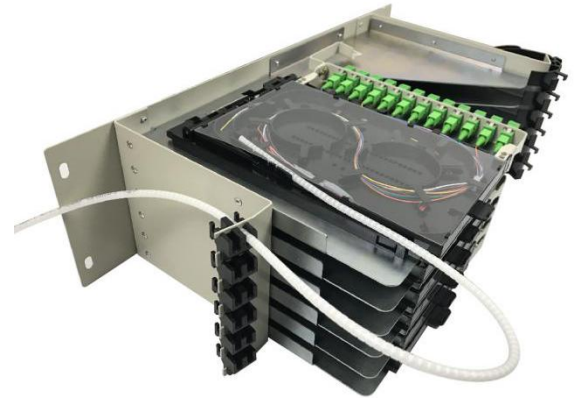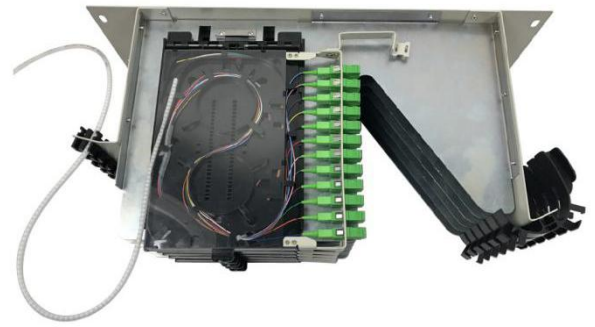

## Dimensions and Capability

Dimensions(H*W*D)	133mm*486mm*258mm
Material	Cold rolled steel; Powder coated
Color	RAL 7035
Weight	4 kg
Maximum Port Capacity	144 Ports for SSF Double Connectors

\* Height is upon request.



LongXing Telecom  
Anju Road, Beilun District, Ningbo, China  
info@lxtelecom.com  
www.lxtelecom.com



LongXing Telecom



LongXingTelecom



+86 574 87908988

+86 574 87908188

Ver: 271216

**LONGXING**

Structured Cabling Solutions

## Shipping Information

Package Contents	Patch panel, 1 unit
Package Dimensions(W*H*D)	It depends on the dimensions of the product
Material	Carton box
Weight	It depends on the dimensions of the product
Lead Time	10-15 working days normally


## Part Details



Special Incoming fiber tube fixing system



Cable Routing Unit

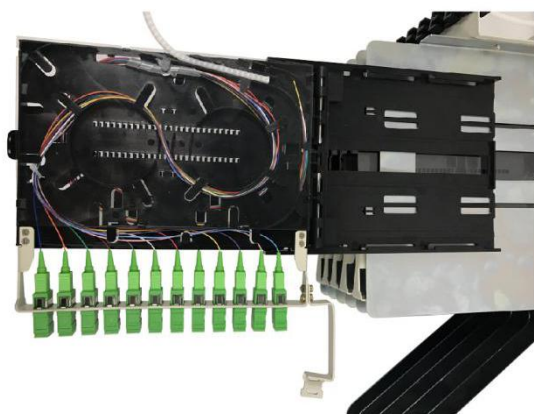

**Double Sided Module System**  
Storage Side



**Double Sided Module System**  
Splice Side

