

Fiber Optic Cable-coiling Box

GP31-2P01A

Overview

This box offers a perfect cost-effective solution for fiber optic cable coiling. It coils an outside optical cable up to 15 meters long and works under both indoor and outdoor environment.

Features

- ABS material used ensures the body strong and light.
- Protective door designed for dust-proof.
- Sealing ring designed for water-proof.
- Easy installations: Ready for wall mount – installation kits provided.
- Cable fixing units provided for fixing optical cable.
- Removable cable entrance.
- Bend radius protected and cable routing paths provided.
- 15 meters long fiber optic cable can be coiled.
- Easy operation: no extra key is needed for closing
- Optional drop cable exit available on the top, side and bottom.
- Optional two fiber splicing is available.



Dimensions and Capability	
Dimensions (W*H*D)	135mm*153mm*37mm
Optional Accessories	Fiber optical cable, adapter
Weight	0.35 KG
Adapter Capacity	One
Number of Cable Entrance/Exit	Max Diameter 4mm, up to 2 cables
Max Length of Cable	15m
Adapter Type	FC simplex, SC simplex, LC duplex



Operation Conditions

Temperature	-40~+85°C
Humidity	93% at 40°C
Air Pressure	62kPa – 101kPa

Shipping Information

Package Contents	Distribution box, 1 unit; Wall mount installation accessories, 1 set
Package Dimensions(W*H*D)	160mm*180mm*60mm
Material	Carton box
Weight	0.85 KG
Lead Time	10-15 working days normally


Part Details



Catalog Number

To order fiber optics distribution box only is GP31-2P01A.

To order fiber optics distribution box with accessories the LongXing catalog number is compiled as follows:

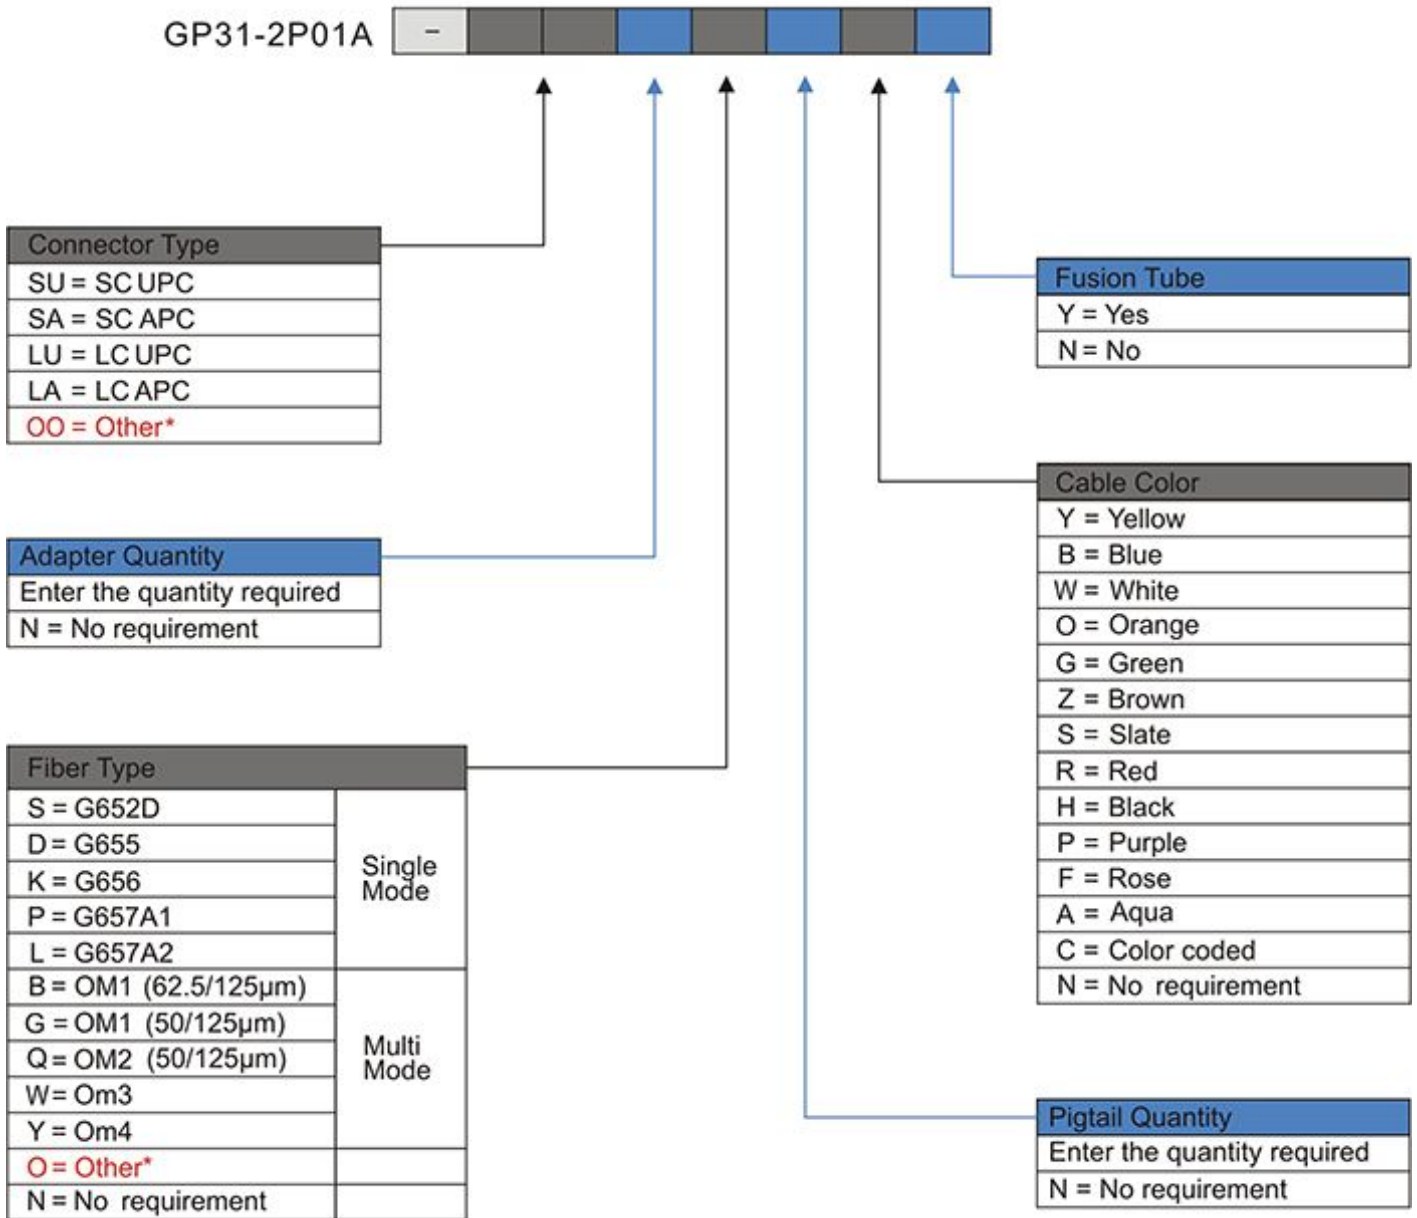

Ordering Example:

GP31-2P01A-SU4S4YN SC UPC, 4 Adapters, G652D, 4 Pigtails, Yellow cable, No fusion tubes

Note: *Cable diameter is 0.9mm.

If the required type of any item is not on the relevant list, please use "O" or "OO" as the red cells indicate, and kindly state the required type in the description of PO.

