

Splice Tray


ST-2D24D

Overview

Splice tray is used in optical distribution frame, distribution box, and splice closures, which is engineered for use with indoor or outdoor splice hardware with both loose tube and tight-buffered optical cable designs. The compact splice cassettes designed for simple, cost effective low and mid-sized fiber splicing applications. Each cassette is supplied with splice holders that secure and protect both fusion and mechanical splices; also the top cover is included.

Features

- ABS material used ensures the body strong and light
- Color option: black(ST-2D24D-1) or white(ST-2D24D-2)
- The fusing distribution board of the unit box is double layer structure, integrating the fusing and distribution into one unity.
- 24-fiber high-density splice trays
- Protect and manage heat shrink style spliced fibers
- Heat shrink splice holder and sleeves included
- Clear cover allows viewing or inspection of fibers without having to remove cover
- Use for single-mode or multimode fiber
- Durable injection-molded plastic trays and covers
- Longer bending radius for fiber, Easy operation of pigtails
- Easily disposed for particular needs
- Suitable for ribbon or non-ribbon optical fiber cable

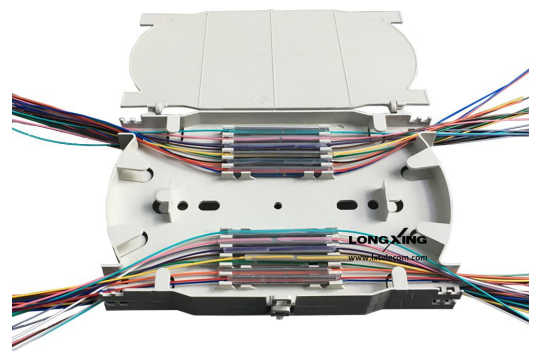

| Dimensions and Capability | |
|-----------------------------|--|
| Dimensions (W*H*D) | 160mm*100mm*15mm per unit |
| Capacity | 24 cores per unit |
| Optional Accessories | Heat Shrink Tubes, Heat Shrink Splice Holder |
| Max diameter of entry cable | 3.0mm |
| Weight | 0.065 KG per unit |




Operation Conditions

| | |
|----------------------|---|
| Temperature | -40°C -- 55°C |
| Sealing performance | Remain unchanged for 72 hours on pressure 70kpa |
| Air Pressure | 70kPa – 106kPa |
| Tensile Strength | >1000N |
| Compressive Strength | Withstand 2000N/10Cm ² in 1min |


Shipping Information

| | |
|---------------------------|--|
| Package Contents | Splice Tray Base with Splice Holder; Splice Tray Cover |
| Package Dimensions(W*H*D) | 200mm*150mm*65mm per unit |
| Material | Carton box |
| Weight | 0.5 KG per unit |
| Lead Time | 10-15 working days normally |

Part Details

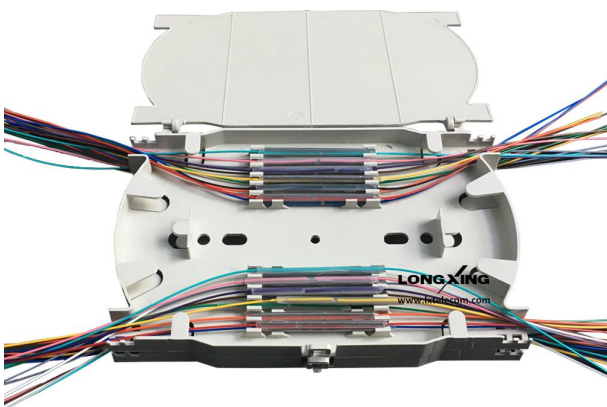

Catalog Number

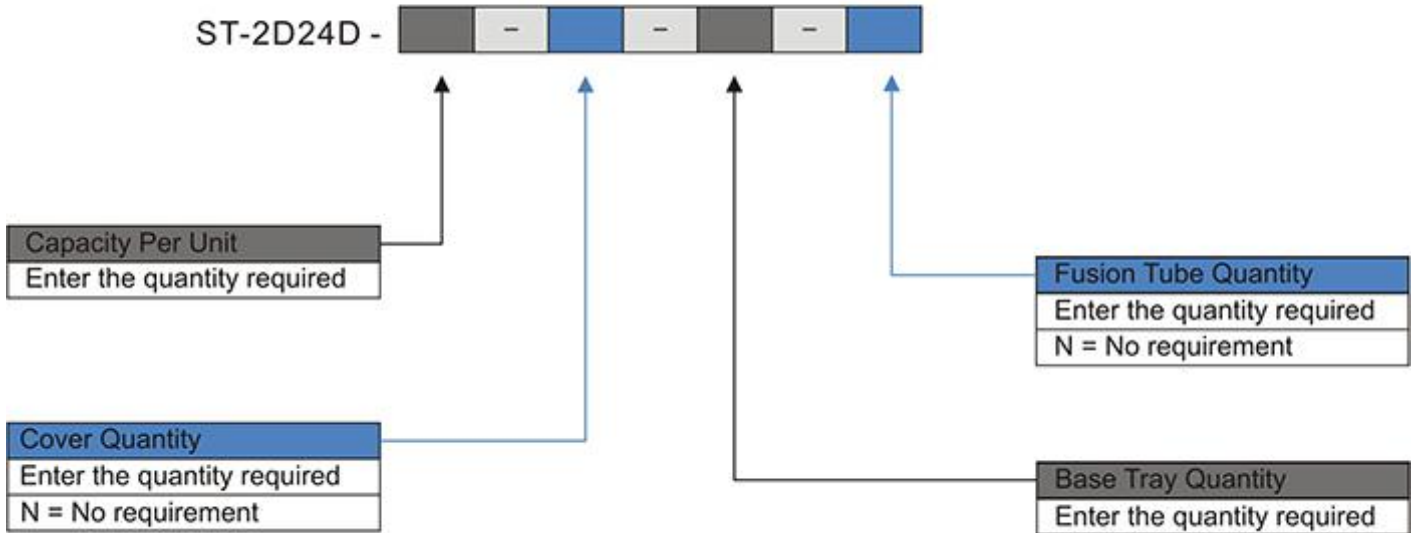

Ordering Example:

ST-2D24D-48-2-2-48 48 cores, 2 covers, 2 base tray, 48 fusion tubes

Note: *Cable diameter is 0.9mm.

If the required type of any item is not on the relevant list, please use "O" or "OO" as the red cells indicate, and kindly state the required type in the description of PO.

