

Cabinet Filter Without Splitter


WDM-F2

Overview

In fiber-optic communications, WDM (wavelength-division multiplexing) is a technology which multiplexes a number of optical carrier signals onto a single optical fiber by using different wavelengths (i.e., colors) of laser light.

This technique enables bidirectional communications over one strand of fiber as well as multiplication of capacity. Generally, WDM technology is applied to an optical carrier which is typically described by its wavelength.

Function Diagram

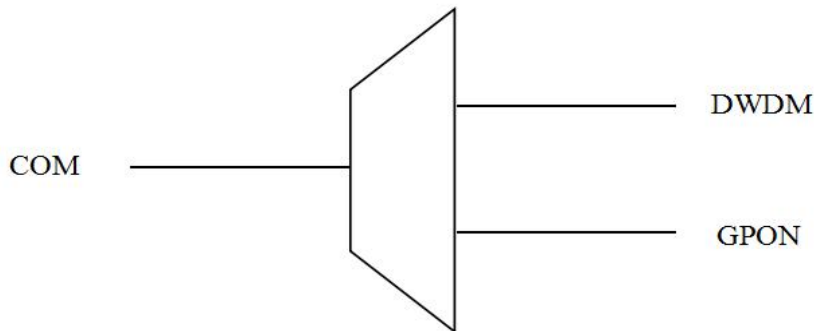

Optical Specifications

Item	Parameters		Specification			Units	Symbol
			Min	Typ	Max		
1.	Reflect Port	DWDM Band	1525~1630			nm	λ_{R1}
		OTDR Band	1636~1671				λ_{R2}
2.	Pass Port	GPON Band	1260 ~1500			Nm	λ_P
3.	Insertion Loss, without connector	Pass Port, λ_P			0.6	dB	IL
		Reflect Port, λ_{R1}			0.45		
		Reflect Port, λ_{R2}			0.6		
4.	WDL, each band	Pass Port			0.3	dB	
		Reflect Port			0.3		
5.	Isolation	Pass Port @ λ_{R1}	25			dB	IS
		Reflect Port @ λ_P	15				
6.	Polarizations Dependent Loss				0.15	dB	PDL
7.	Return Loss	Without connector	50			dB	RL
		With connector	45				
8.	Directivity		50			dB	DIR
9.	Polarization Mode Dispersion				0.2	ps	PMD
10.	Optical Power				27	dBm	
11.	Maximum Relative Humidity, non-condensing				85	%	
12.	Operationg Temperature		-5		70	°C	
13.	Storage Temperature Range		-40		70	°C	
14.	Relative Humidity, non-condensing		5		95	RH	




Package Specifications

- Filter in the Street Cabinet

It will be Y cable filter with SC/APC connectors.

Y-Cable						
Item	Parameters	Min	Typ	Max	Units	Note
1.	Fiber Type	G.657A1				
2.	Fiber Jacket	250µm bare fiber				
3.	Fiber Length	COM	0.5		m	
		DWDM+OTDR				
		GPON				
4.	Connector Type	All ports	SC/APC			
5.	Connector Loss, per pair			0.3	dM	
6.	Packaging Dimensions	90 x 16 x 9			mm	
7.	Port Identifications	Refer drawing below				
8.	Product Label	Show Customer P/N, SN				

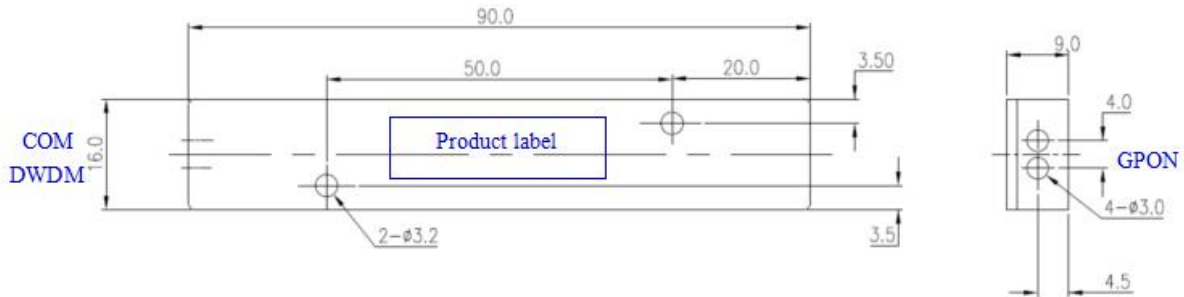

NOTE:
 1.MAT'L OF HSG & CVR:GE EXL9330
 2.COLOUR: BLACK
 3.UNITS: MM
 4.TOL'S: .X=±0.2
 .XX=±0.1
 5.PROJECTION:

Note: The unused hole will be blocked.

Part Details

