

# Digital Distribution Frame (75 Ω)

MPX316

## Overview

A Digital Distribution Frame (DDF) is the interface when coaxial cable has to be terminated, organized or cross-connected in long-distant transport networks, or in access networks close to subscribers. LongXing is expert in producing DDF products and currently providing products to China's main telecom networks in 28 provinces. The frame is equipped with perfect earth system, and 75 Ω / 120 Ω convertor can be provided at user's requirement. 75 Ω Digital Distribution Frames are used to terminate, cross-connect and inter-connect. 75 Ω coaxial cables, and to supervise digital transmission equipment.




## Descriptions

- The frame is made from special aluminum alloy and quality steel plate. The surface is treated with galvanization, oxidation, plastics spraying etc. with the advantage of stable structure and pleasing appearance
- The frame is fully closed structure with good performance of dust-proof and neat and pleasing appearance.
- Module structure is adopted for flexible and convenient configuration and installation.
- Rotary structure is selected for each unit plate. The unit plate can be rotated downward freely to facilitate the connection and maintenance of cable.
- The frame is provided with perfect earth system.
- The contact surface of coaxial connector is treated with gold plating so as to ensure contact and safety.
- The gauge of the connector without test is only 13 mm. The capacity for same space.


Specifications		
EXTERNAL DIMENSION (H * W * D)	MAXIMUM CAPACITY (ALL ARE CROSS CONNECTION)	REMARK
2600*600*300	12 systems/unit, 144 systems (12 units) / frame	1) Closed, vertical unit 2) Vertical structure
2200*600*300	12 systems/unit, 96 systems (8 units) / frame	
2000*600*300	12 systems/unit, 72 systems (6 units) / frame	
2600*480*300	10 systems, 100 systems (10 units)/frame	1) Closed, rotary unit, 2) horizontal assembly
2200*480*300	10 systems, 80 systems (8 units)/frame	
2000*480*300	12 systems/unit, 72 systems (6 units) / frame	
2600*480*450	12 systems/unit, 240 systems (20 units) / frame	1) Closed, rotary unit, horizontal assembly 2) Double-side frame
2200*480*450	12 systems/unit, 192 systems (16 units) / frame	
2000*480*450	12 systems/unit, 144 systems (12 units) / frame	




● UNIT

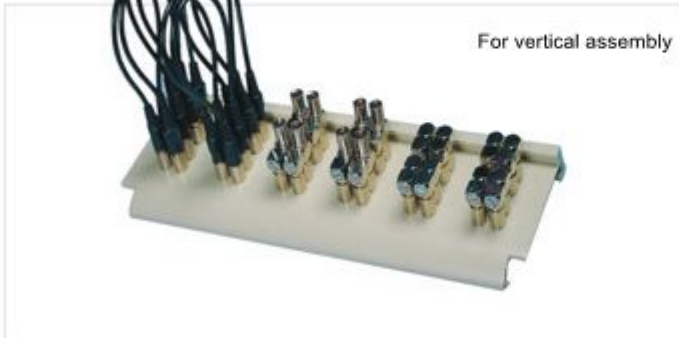

● CONNECTOR

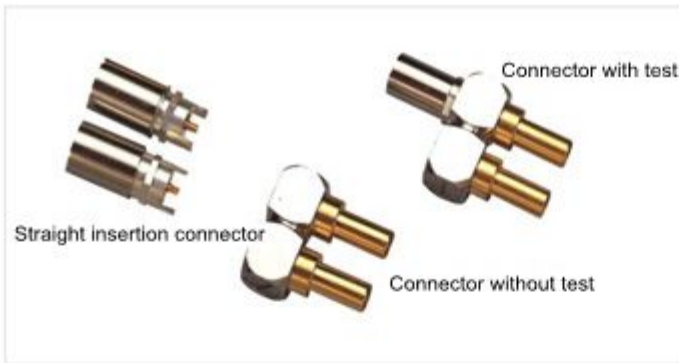

● ACCESSORY

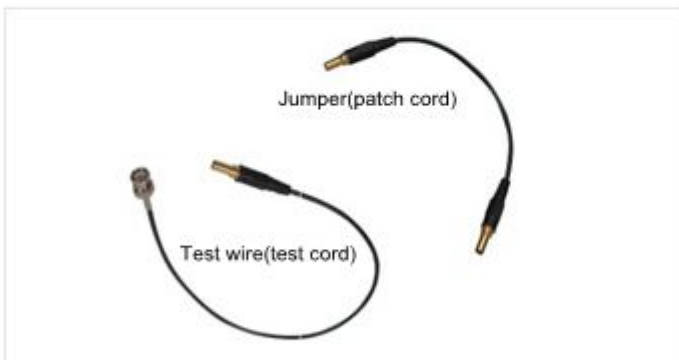

Vertical unit type



● UNIT



Horizontal unit type

