

Optical Fiber Distribution Frame

GPX09T



Dimensions and Capability

Dimensions(H*W*D)	Quantity of 12 cores integrated trays	Full capacity (without splitter tray)
2000*840*300	48	576
2200*840*300	60	720
2600*840*300	72	864

*Customized designs are available upon request




Overview

LongXing optical fiber distribution frame GPX09T is made of top quality steel and deformed aluminum alloy and treated with galvanizing, oxidation and electrostatic plastic spraying. The frame has solid structure and pleasing appearance.


Features

- This frame reached both YD/T778 and Chinese telecom enterprise product standard “CT GPX09T Optical Fiber Distribution Frame (splice and distribution integrated module)”.
- The indoor frame contains the functions of optical fiber terminal, distribution, transfer and storage, with the advantage of big capacity, convenient for operation, as well as plays a major role in optical cable communications.
- Fully front side operation.
- Adapters are installed on the 12 cores splice and distribution integrated tray, as well as the tray is installed on the tray rack mount. (Capacity subjects to different requirements)
- Cable and pigtail can be inlet from the top of the frame. Cable (fiber) inlet hole is protected by cable-protected belt and contains enough space for fiber crossing.
- Both left and right sides of the frame are embedded removable structure, as well as the side rack should be removed when frames combine.

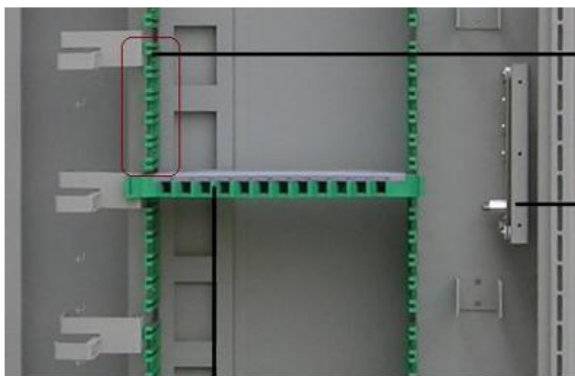

6-position integrated manager

Side cable fixing stripping module

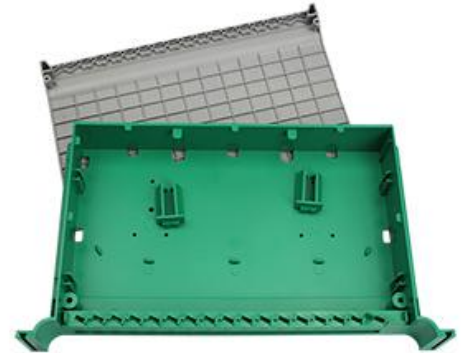

Optional Elements

- Hardware to fasteners, and fastening to the number of fiber needed can be offered on request.
- Elements to protect buffers depending on the number of cables needed can be offered on request.
- Accessories such as screws, nut, fasteners for raiser floor or concrete floor can be offered on request.
- Customer's logo can be printed on the upper left corner or upper right corner of the frame on request.

Operation Conditions


Temperature	-5℃ -- 60℃
Humidity	90% at 30℃
Air Pressure	70kPa – 106kPa

Shipping Information

Package Contents	ODF 1 unit
Package Dimensions(W*H*D)	It depends on the dimensions of the product
Material	wooden box
Weight	It depends on the dimensions of the product
Lead Time	10-15 working days normally



Catalog Number

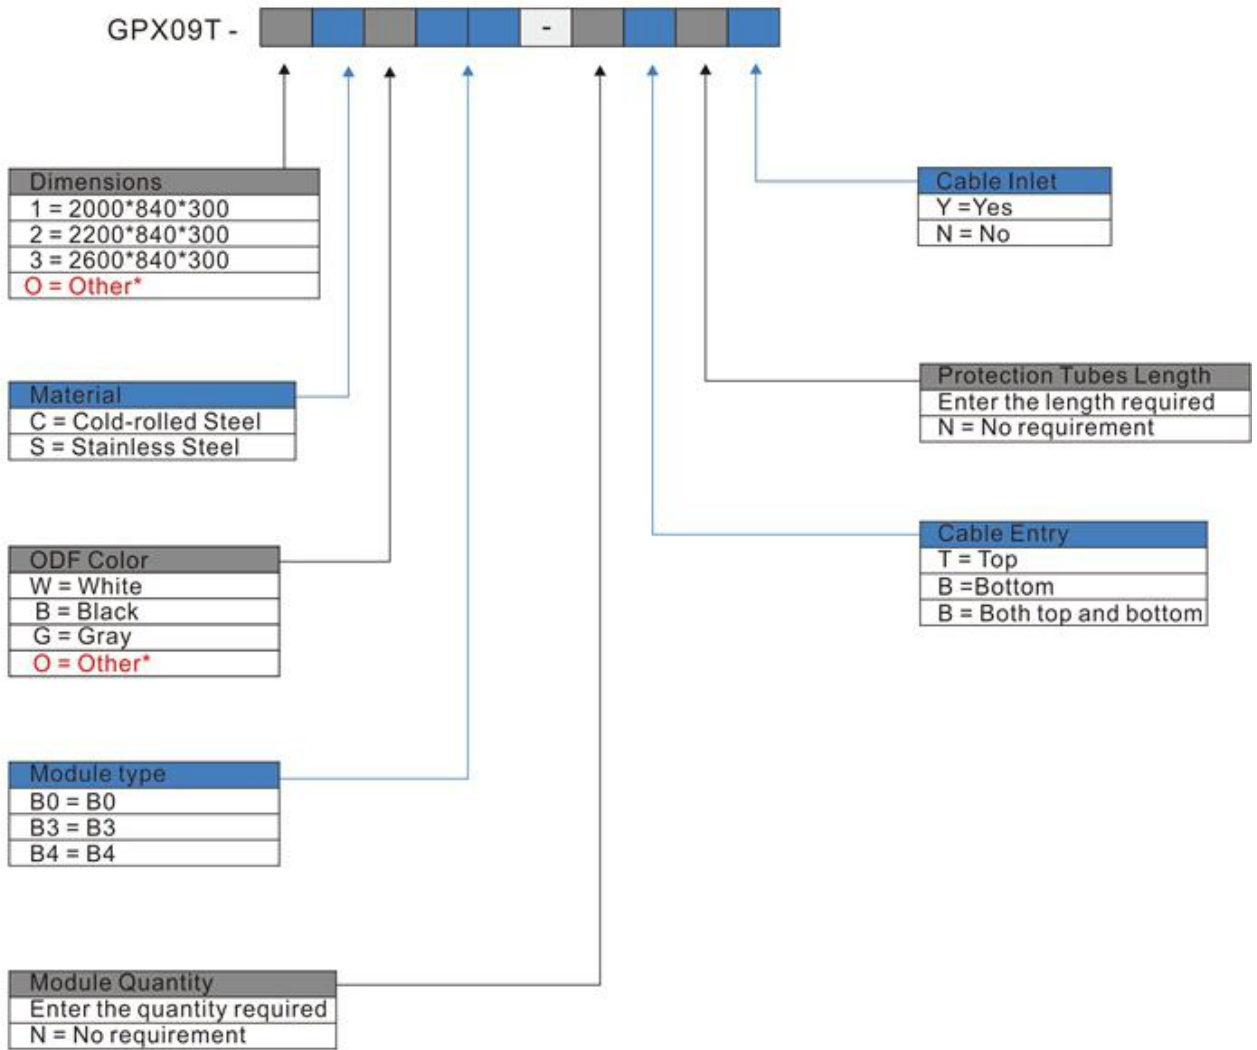

Ordering Example:

GPX09T-1CWB0-4TNN 2000*840*300, Cold-rolled steel, White, Module B0, 4 Modules, Top cable entry, No protection tubes, No cable inlet.

Note : *If the required type of any item is not on the relevant list, please use "O" or "OO" as the red cells indicate, and kindly state the required type in the description of PO.

