Fiber Optic Patch Cord

MTP/MPO Harness Cable

Overview

LongXing MTP/MPO multi-fiber cabling system is ideally suited for a high density environment that demands space saving and innovative cable management solutions. MTP/MPO fan-out supports various connections from multi-fiber to single-fiber out.

Features

- Color coded connector housings are available to differentiate fiber type as follows:
- Green for SM
- Yellow for SM Super Low loss
- Beige for MM
- Aqua for OM3 Fiber
- Heather-Violet for OM4 Fiber
- Capacity are available in 4, 8, 12 and 24.
- Ferrules are available for SM Standard, SM Super Low Loss, MM Standard and MM Low Loss.
- Boots are available for Ribbon Cable, Ribbon Fiber and Round boot.

Highlights

- Lower Insertion loss
- Removable Housing
- Spring Push with Slit for easier assembly
- MTP/MPO-HD for High Density Application
- Flex angle boot and other boot styles
- IP-MTP/MPO Outdoor rated IP-68 housing

Applications

- Telecommunications
- Local area network
- Fiber to the home
- Testing instruments

MTP/MPO Connector Types



MPO/MTP Male with Pins



MPO/MTP Female without Pins









| MTP/MPO Side Technical Specifications | | | | | | | | |
|---------------------------------------|-----------------------------|----------|------------------------------|---------|--|--|--|--|
| SPECIFICATION | SM STANDARD | | MM STANDARD | | | | | |
| MPO | Typical | Max | Typical | Max | | | | |
| Insertion Loss | 0.2 dB | 0.7 dB | 0.15 dB | 0.50 dB | | | | |
| Return Loss | 60 dB (8° Polish) | | 25 dB (Flat Polish) | | | | | |
| Durability | < 0.30dB change 500 matings | | < 0.20dB change 1000 matings | | | | | |
| Ferrule type available | 4, 8 | , 12, 24 | 4, 8, 12, 24 | | | | | |
| Operating Temperature | -40 to +75°C | | | | | | | |
| Storage Temperature | -40 to +85°C | | | | | | | |

| Fan-out Side Technical Specifications | | | | | | |
|---------------------------------------|----------------|-----------------|------------|--|--|--|
| SPECIFICATION | Single Mode PC | Single Mode APC | Multi-mode | | | |
| Insertion Loss | < 0.2 dB | < 0.3 dB | <0.3dB | | | |
| Return Loss | > 50 dB | > 60 dB | N/A | | | |

| Wire map configurations | | | | | | | | | | |
|-------------------------|-------|-----------------------------|-------|----------------------------|-------|--|--|--|--|--|
| Straight Type A wiring | | Total flipped Type B wiring | | Pair flipped Type C wiring | | | | | | |
| (Straight Through) | | (Cross) | | (Cross Pair) | | | | | | |
| Fiber | Fiber | Fiber | Fiber | Fiber | Fiber | | | | | |
| 1 | 1 | 1 | 12 | 1 | 2 | | | | | |
| 2 | 2 | 2 | 11 | 2 | 1 | | | | | |
| 3 | 3 | 3 | 10 | 3 | 4 | | | | | |
| 4 | 4 | 4 | 9 | 4 | 3 | | | | | |
| 5 | 5 | 5 | 8 | 5 | 6 | | | | | |
| 6 | 6 | 6 | 7 | 6 | 5 | | | | | |
| 7 | 7 | 7 | 6 | 7 | 8 | | | | | |
| 8 | 8 | 8 | 5 | 8 | 7 | | | | | |
| 9 | 9 | 9 | 4 | 9 | 10 | | | | | |
| 10 | 10 | 10 | 3 | 10 | 9 | | | | | |
| 11 | 11 | 11 | 2 | 11 | 12 | | | | | |
| 12 | 12 | 12 | 1 | 12 | 11 | | | | | |








2

Pre-terminated MTP Technology-Polarity

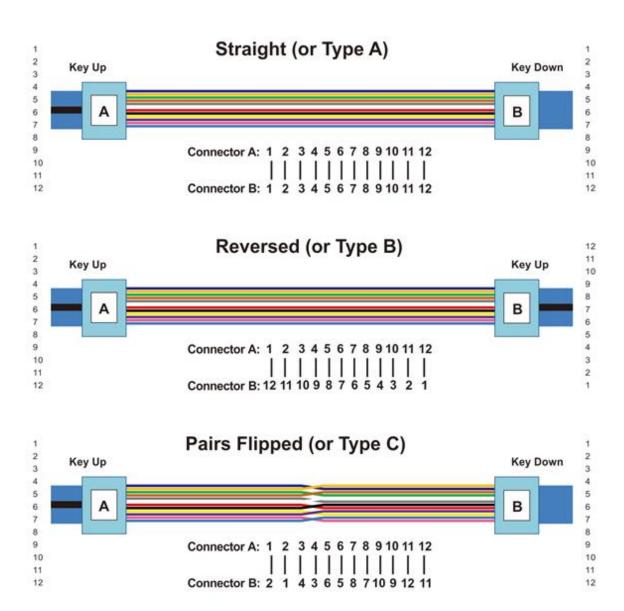

LongXing Telecom


www.lxtelecom.com







Catalog Number

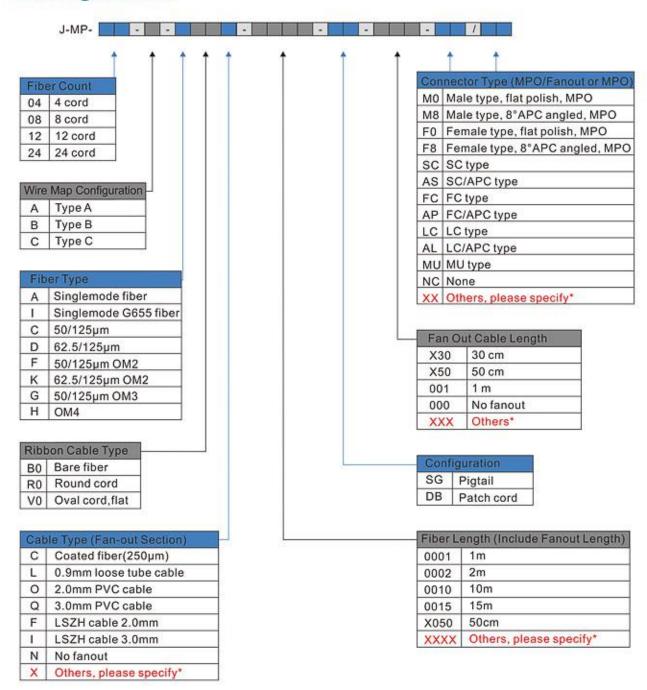

Ordering Example:

J-MP-12-A-G-R0L-0003-DB-001-F0/LC MPO, 12 cord, Type A, 50/125μm OM3, Round cord, 0.9mm loose tube cable, 3m fiber , Patch cord, 1m fan out, Female type, flat polish, MPO/LC type.

Note: "If the required type of any item is not on the relevant list, please use "X", "XXX" or "XXXXX" as the red cells indicate, and kindly state the required type in the description of PO.







LongXing Telecom