


GPX82-9-2 ▲

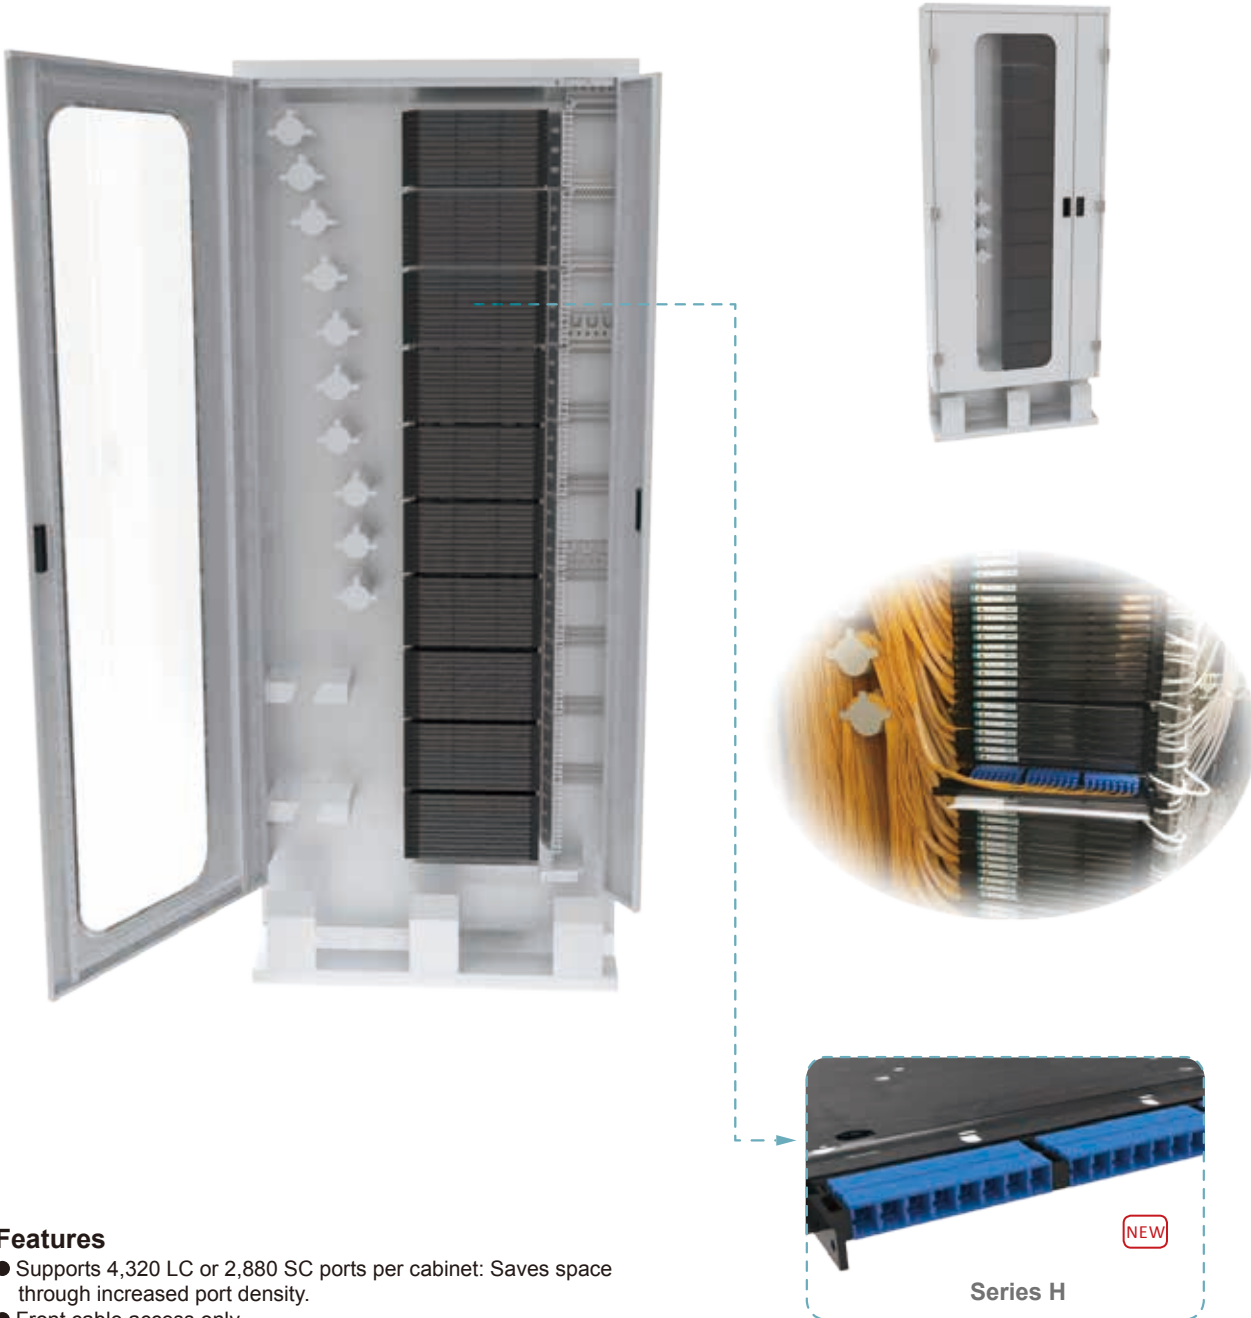

Features

- Supports 4,320 LC or 2,880 SC ports per cabinet: Saves space through increased port density.
- Front cable access only.
- Allows for back-to-back frame configuration.
- Modular design: Enables one rack for many application spaces e.g. central office, headend, FTTx and data center.
- Increased patch cord routing space: Supports standard 1.6 and 2.0 mm patch cords.

GPX82-9-2	Dimensions(H*W*D)mm	Max Capacity(SC)	Max Capacity(LC)	Patch Panels with Regular Rail		
				Model	SC	LC
	2200*900*300	2880	4320	1U	72	108
2U				144	216	
3U				216	324	
4U				288	432	

Catalog Number

GPX82-9-2-



Dimensions
1 = 2200*900*300
O = Other*

Material
G = Galvanized Steel
S = Stainless Steel
C = Cold-rolled Steel

ODF Color
W = White
B = Black
G = Gray
O = Other*

Module Type
H1 = H1

Module Quantity
Enter the quantity required
N = No requirement

Cable Inlet
Y = Yes
N = No

Protection Tubes Length
Enter the length required
N = No requirement

Cable Entry
T = Top
B = Bottom
M = Both top and bottom

Ordering Example:

GPX82-9-2-1CWH1-04TNN : ODF, 2200*900*300, Cold-rolled steel, White, Module H1, 4 modules, Top cable entry, No protection tubes, No cable inlet

Note : *If the required type of any item is not on the relevant list, please use "O" or "OO" as the red cells indicate, and kindly state the required type in the description of PO.