

High Density Splicing Patch Panel

ODU-L25


Overview

LongXing High density splicing patch panel ODU-L25 series can be installed on standard 19" racks and provides an ultra high density solution for splicing drop cables with pigtails & pigtails with pigtails. Each 4U patch panel can splice up to 288 cores. Spacious interior with cable clamps and fiber management rings ensures all the drop cables and pigtails are safely organized. Sliding mechanism both forward and backward ensures that the operations will be convenient.



Features

- Top quality steel with cover by nonflammable electrostatic painted ensures a strong body, resistance to corrosive influences and pleasing appearance.
- Front and rear door have push buttons; allow easy access to the splicing trays.
- Easy operations: Sliding mechanism both forward and backward.
- Easy installations: 19" wall mounting.
- For standard 19" racks use (other rack width options available on request)
- Adoptable adapter types: SC simplex adapters and LC duplex adapters.

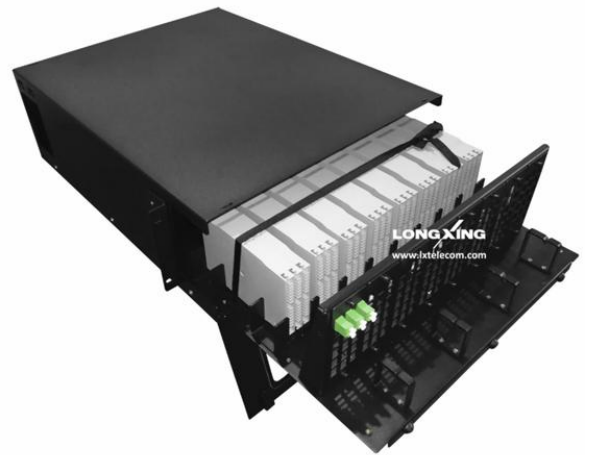

Dimensions and Capability

Model	Height	Depth	Width	Capacity	
				SC	LC duplex
L25-1 (Fiber to fiber)	4U	450	19"	144	288
L25-2 (Drop cable to fiber)	4U	550	19"	144	288



Operation Conditions

Temperature	-5°C -- 60°C
Humidity	90% at 30°C
Air Pressure	70kPa – 106kPa

Shipping Information

Package Contents	Patch panel, 1 unit
Package Dimensions(W*H*D)	It depends on the dimensions of the product
Material	Carton box
Weight	It depends on the dimensions of the product
Lead Time	10-15 working days normally

Technical Drawing

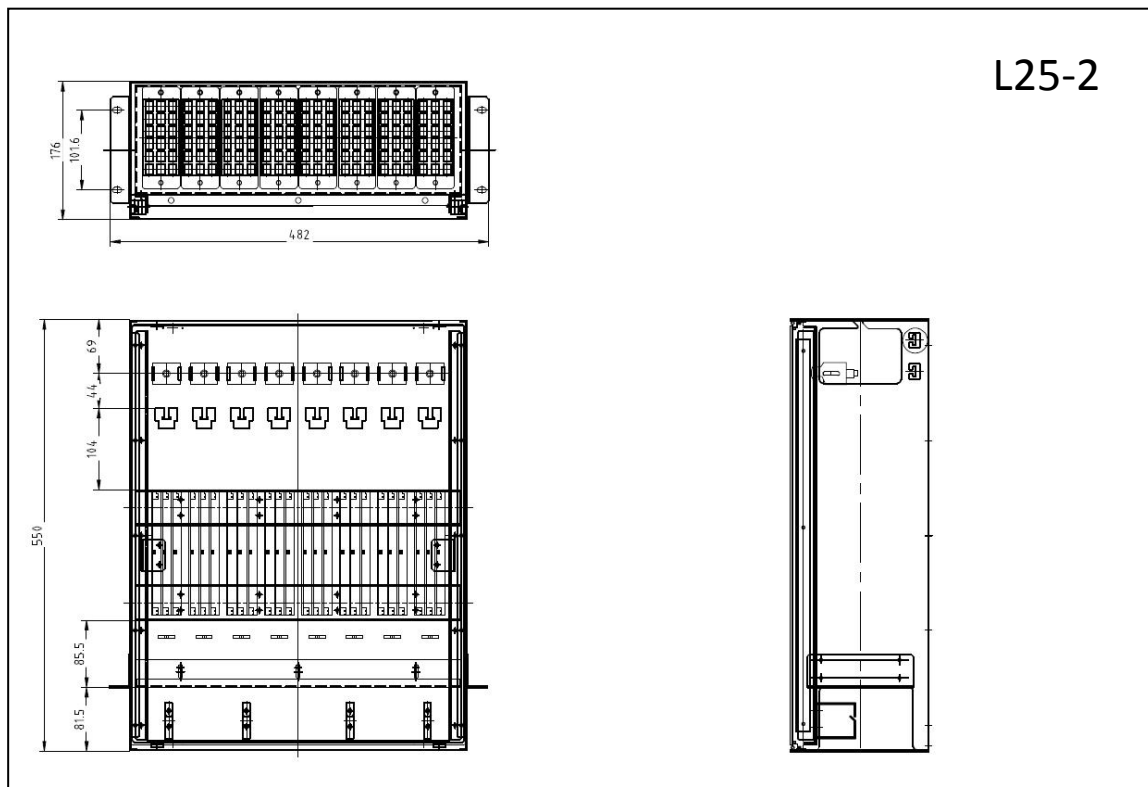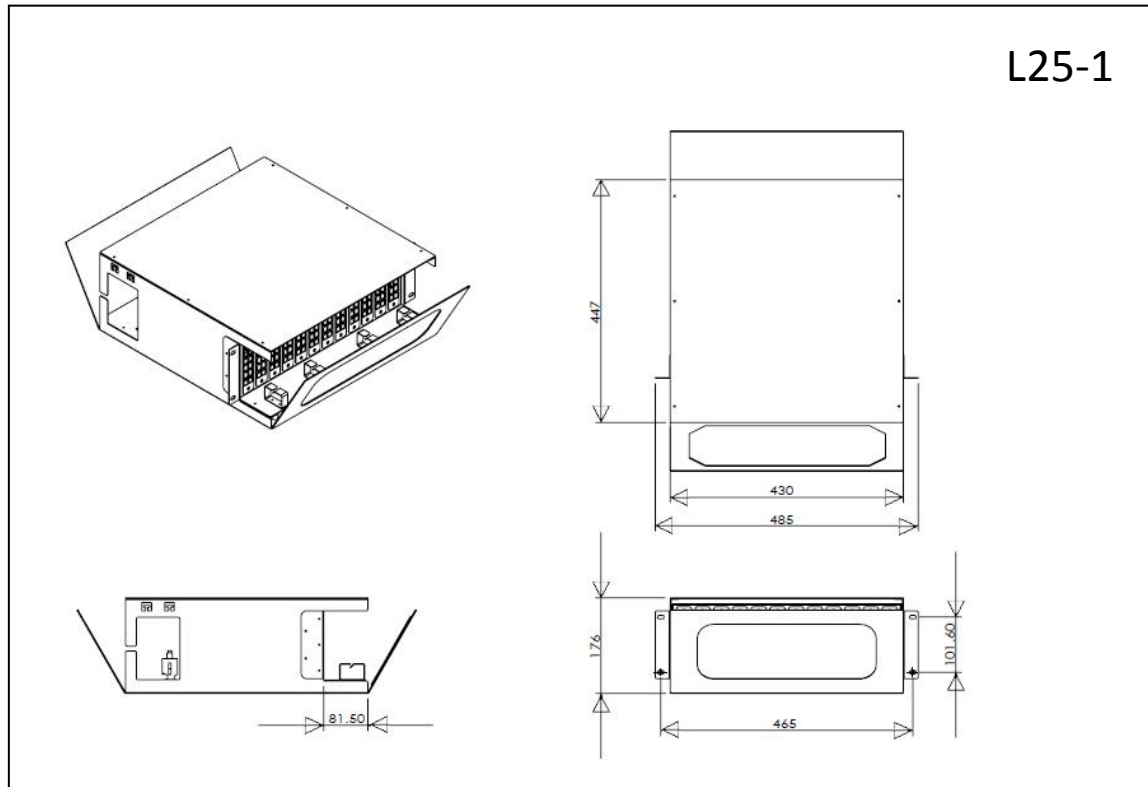

Part Details

L25-1



L25-2

