


Fiber Optic Accessories

Hot Melt Type Connector

Features

- Thread and integration structure with reliable connector;
- Screw type tail, applicable for drop cable and other usual indoor cables
- Mature heat shrinkable tube inside
- Pls use the splicing machine

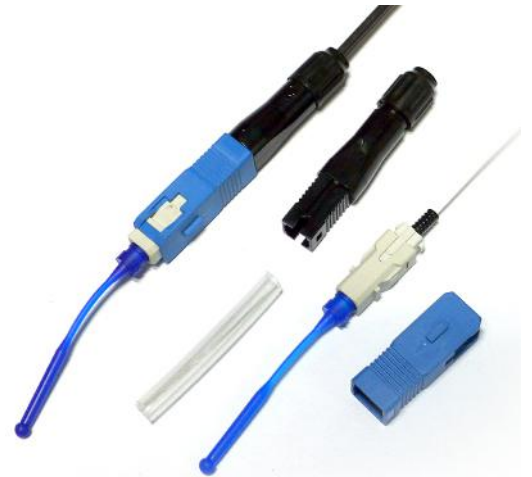

Technical Specifications

Parameters	FC/PC	FC/UPC	FC/APC
Working Temperature (°C)		-40— +80	
Insertion Loss (dB)	≤0.25	≤0.25	≤0.25
Return Loss(dB)	≥45	≥50	≥60

Technical Specifications

Insertion Loss (dB)	<0.3dB
Return Loss(dB)	>50B/PC
4 meters high drop off test (3 times)	<0.2dB
High temperature test	<0.2dB
Low temperature test	<0.2dB
Temperature cycle test	<0.2dB
Wet and hot test	<0.2dB
Vibration test	<0.2dB
Marinated test	<0.2dB

