

Fiber Optic Splice Closure

GPJ83 - 8

Overview

LongXing GPJ83-8 optical splice closures are used to distribute, splice, and store the outdoor optical cables which enter and exit from the ends of the closure. There are two connection ways: direct connection and splitting connection. They are applicable to situations such as overhead, man-well of pipeline, embedded situation etc. Comparing with terminal box, the closure requires much stricter requirement of seal. Sealing ring and air valve are required for closure, but that are not necessary for terminal box.

Features

- The closure casing is made of quality engineering plastics, and of good performance of anti-erosion against acid and alkali salt, anti-aging, as well as smooth appearance and reliable mechanical structure.
- The mechanical structure is reliable and has the performance of resisting wild environment and intensive climate changes and serious working environment. The protection grade reaches IP66.
- The closures are applicable to ribbon type optical cable and common optical cable.
- The splice trays inside the closure are turn-able like booklets, and have adequate curvature radius and space for winding optical fiber to make sure the curvature radius for optical winding 40mm.Each optical cable and fiber can be operated individually.
- The closure is of small volume, big capacity and convenient maintenance.
- The elastic rubber seal rings inside the closure are of good sealing and sweat-proof performance.
- The casing can be opened repeatedly without air leakage. No special tools are required. The operation is easy and simple. The air valve is provided for the closure and used to check the sealing performance.



Dimensions and Capability

| | |
|-------------------------------|-----------------------------------|
| Dimensions (L*W*H) | 392mm*152mm*54mm |
| Max Capacity | Bundle 24 Cores; Ribbon 144 Cores |
| Number of Cable Entrance/Exit | 2 ; 2 |
| Diameter of Cable | Less than Φ20mm |



| Operation Conditions | |
|----------------------|---------------|
| Temperature | -40℃~+60℃ |
| Humidity | ≤95% (at 40℃) |
| Air Pressure | 70kPa ~106kPa |

| Shipping Information | |
|----------------------------|--|
| Package Contents | Closure, 1 unit; Installation accessories, 1 set |
| Package Dimensions((L*W*H) | 415mm*250mm*120mm |
| Material | Carton box |
| Weight | |
| Lead Time | 10-15 working days normally |


Technical Specifications

- Seal performance: after the box is sealed, inflate to 100kPa inwards (inflation only apply to the models with the air hole), and then soak it in the water of normal temperature, after 15 minutes of steady observation, there is no bubble to overflow.
- Insulation resistance: the insulation resistance between the metal work piece and the earth is greater than 20kMΩ.
- Pressurization: there is no breakdown or flashover under 15kVdc/1min between the metal work piece and the earth.
- The curvature radius of the fiber 40mm, without extra loss inside the splice tray.
- It can bear the axial tensile strength no less than 1000N.
- Lifetime: 25 years.
- Other performances are all in accordance with the requirement of standard YD/T814-1998.

Part Details



Catalog Number

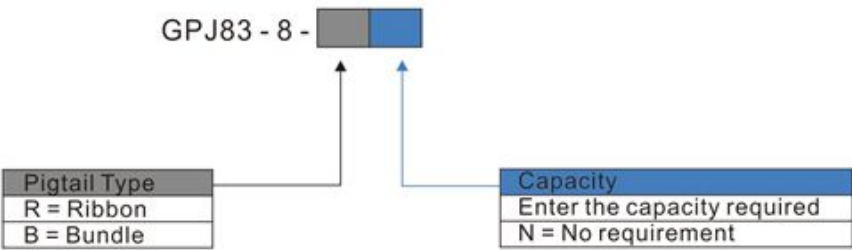

Ordering Example:

GPJ83-8B24 Bundle pigtail, 24 Cores.

Note : *If the required type of any item is not on the relevant list, please use "O" or "OO" as the red cells indicate, and kindly state the required type in the description of PO.

More relevant designs for your reference.

| Model | Dimensions (H*W*D) mm | Capacity | | | | Entries | | Cable Diameter (mm) |
|----------|--------------------------|----------|-----|--------|-----|------------------|------------|------------------------|
| | | Bundle | E.W | Ribbon | E.W | Standard Entries | E.W | |
| GPJ83-1 | 420*145*145 | 96 | N/A | 320 | N/A | 2 in 2 out | N/A | ≤ Φ20 |
| GPJ83-2 | 460*260*145 | 144 | N/A | 480 | N/A | 3 in 3 out | N/A | ≤ Φ20 |
| GPJ83-3 | 480(L)*Φ 150 | 72 | N/A | 320 | N/A | 2 in 2 out | N/A | ≤ Φ20 |
| GPJ83-4 | 660*220*178 | 192 | N/A | 480 | N/A | 3 in 3 out | N/A | ≤ Φ20 |
| GPJ83-5 | 650(L)*Φ 235 | 192 | 144 | 560 | 480 | 3 in 3 out | 1 in 1 out | ≤ Φ20 (Φ 23 for E.W) |
| GPJ83-6 | 500(L)*Φ 171 | 144 | N/A | 480 | N/A | 3 in 3 out | N/A | ≤ Φ20 |
| GPJ83-7 | 450*200*125 | 96 | N/A | 320 | N/A | 2 in 2 out | N/A | ≤ Φ20 |
| GPJ83-8 | 392*152*54 | 24 | N/A | 144 | N/A | 2 in 2 out | N/A | ≤ Φ20 |
| GPJ83-9B | 500(L)*Φ 171 | 72 | 144 | 320 | 480 | 2 in 2 out | 1 in 1 out | ≤ Φ20 (Φ 23 for E.W) |
| GPJ83-10 | 275(L)*Φ 148 | 12 | N/A | N/A | N/A | 2 in 2 out | N/A | ≤ Φ13.6 |