# Rack Mount Patch Panel

ODU-L20

Overview

Rack Mount Patch Panel ODU-L20 are used for fiber termination and storage of pigtails. Our panels provide easy installation and complete access to the inside of the panel, by being hinged on the front left side. The panel is equipped with a removable metal door, a vertical cable management trough, and plexiglass windows with designation labels. These panels can be mounted in 19¨ racks or cabinets. 6 position adapter holders must be ordered separately. The holders are available loaded with either FC, LC or SC type adapters.
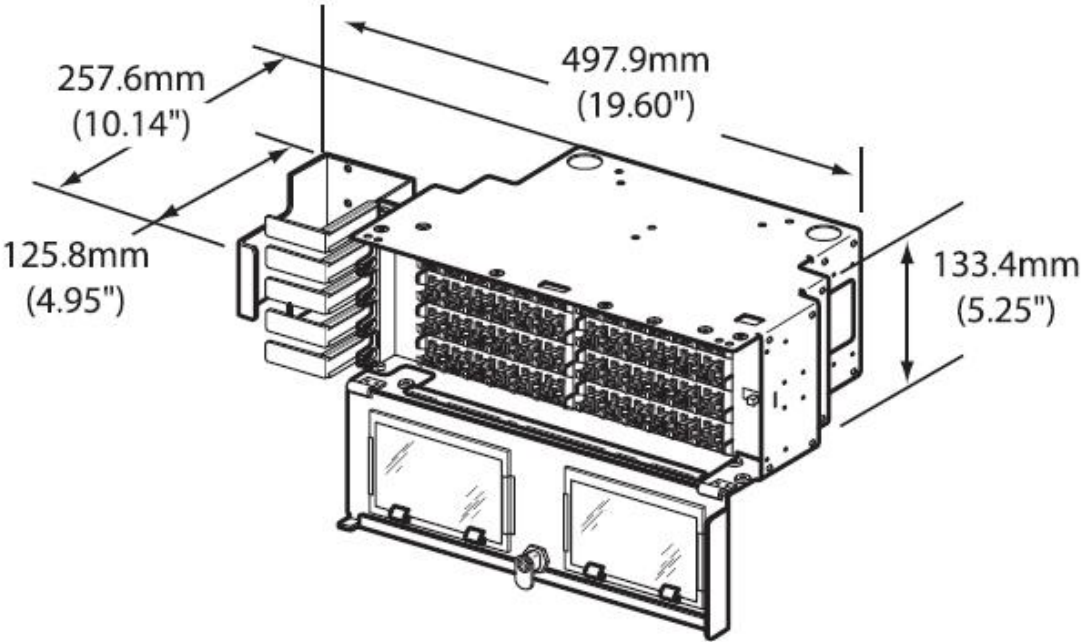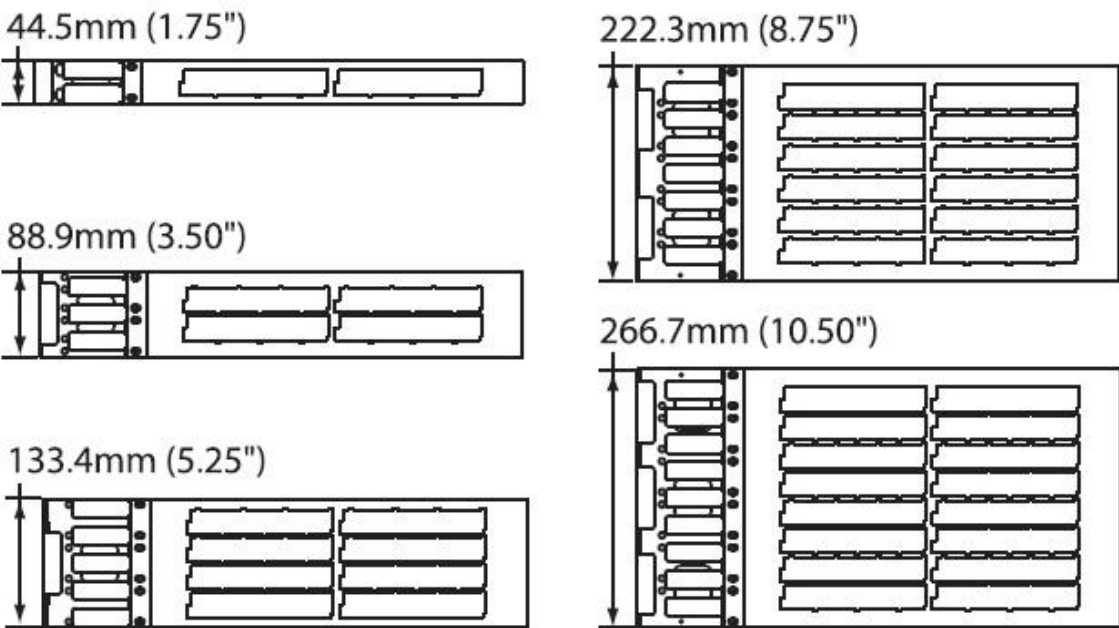
Features

- Mounting:
  - ✧ 19-inch racks or cabinets
  - ✧ Other mounting kits available
- Fiber Chassis Data:
  - ✧ Fiber capacity: 72 FC/SC, or 144 LC
  - ✧ Termination
  - ✧ Pigtail storage
- Hinged on left front side; allows full access to rear of front plate and interior of panel
- 6 position adapter holders sold separately
- Constructed of high strength aluminum
- Equipped with removable metal doors with Plexiglass windows
- Designation labels included with each panel
- Complete line of accessories including locks for security, cable clamp kits, bonding/grounding kits, ordered separately
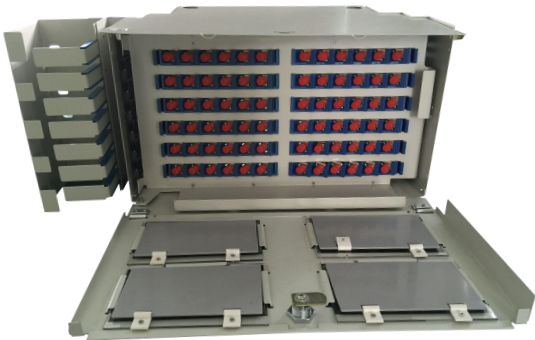
Dimensions and Capability

Height	Depth	Width	Capacity	
			FC/SC	LC Duplex
266.7mm / 6U	257.6mm	19 inch	96	192
222.3mm / 5U	257.6mm	19 inch	72	144
133.4mm / 3U	257.6mm	19 inch	48	96
88.9mm / 2U	257.6mm	19 inch	24	48
44.5mm / 1U	257.6mm	19 inch	12	24

Technical Drawings

44.5mm (1.75")

88.9mm (3.50")

133.4mm (5.25")

222.3mm (8.75")

266.7mm (10.50")

257.6mm (10.14")

125.8mm (4.95")

497.9mm (19.60")

133.4mm (5.25")

Operation Conditions

Temperature	-40℃ -- 60℃
Humidity	93% at 40℃
Air Pressure	62kPa – 101kPa

Shipping Information

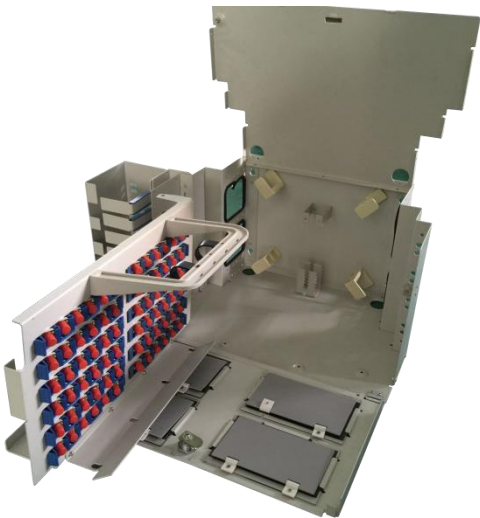|	
Package Contents	Patch panel, 1 unit
Package Dimensions(W*H*D)	It depends on the dimensions of the product
Material	Carton box
Weight	It depends on the dimensions of the product
Lead Time	10-15 working days normally

Part Details

5U

5U

5U

5U