

# Optical Fiber Distribution Frame

GPX09R



## Dimensions and Capability

| Dimension(H*W*D) | Capacity(Core / Unit) | Max Unit | Max capacity |
|------------------|-----------------------|----------|--------------|
| 2000*840*300     | 144                   | 10       | 1440         |
| 2200*840*300     | 144                   | 12       | 1728         |
| 2600*840*300     | 144                   | 16       | 2304         |

\*Customized designs are available upon request



## Overview


LongXing optical fiber distribution frame GPX09R is made of top quality steel and deformed aluminum alloy and treated with galvanizing, oxidation and electrostatic plastic spraying. The frame has solid structure and pleasing appearance.

## Features

- This frame is made of top quality steel and deformed aluminum alloy and treated with galvanizing, oxidation and electrostatic plastic spraying.
- The frame has solid structure and pleasing appearance.
- Fully-closed structure with the advantages of good performance of dust-proof, pleasing and neat appearance.
- Cable fixing unit is installed on the top of the frame which has excellent performances for fixing the cables.
- Fully front side operation, convenient for maintenances.
- Modular design of 144-FO-Splicing-Unit is adopted. Each unit holds up to 12 12-FO-Splice-Tray.



144 FO Splicing Unit

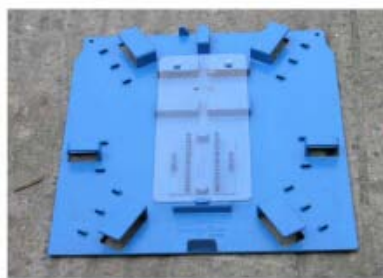

12 FO Splicing Tray

## Optional Elements

- Hardware to fasteners, and fastening to the number of fiber needed can be offered on request.
- Elements to protect buffers depending on the number of cables needed can be offered on request.
- Accessories such as screws, nut, fasteners for raiser floor or concrete floor can be offered on request.
- Customer's logo can be printed on the upper left corner or upper right corner of the frame on request.

| Operation Conditions |                |
|----------------------|----------------|
| Temperature          | -5℃ -- 60℃     |
| Humidity             | 90% at 30℃     |
| Air Pressure         | 70kPa – 106kPa |

| Shipping Information      |   |
|---------------------------|---|
| Package Contents          | ODF 1 unit                                  |
| Package Dimensions(W*H*D) | It depends on the dimensions of the product |
| Material                  | wooden box                                  |
| Weight                    | It depends on the dimensions of the product |
| Lead Time                 | 10-15 working days normally                 |



# Catalog Number

GPX09R - 

| Dimensions       |
|------------------|
| 1 = 2000*840*300 |
| 2 = 2200*840*300 |
| 3 = 2600*840*300 |
| O = Other*       |

| Material              |
|-----------------------|
| C = Cold-rolled Steel |
| S = Stainless Steel   |

| ODF Color  |
|------------|
| W = White  |
| B = Black  |
| G = Gray   |
| O = Other* |

| Patch Panel Type |
|------------------|
| 1 = 144          |

| Patch Panel Quantity        |
|-----------------------------|
| Enter the quantity required |
| N = No requirement          |

| Cable Inlet |
|-------------|
| Y = Yes     |
| N = No      |

| Protection Tubes Length   |
|---------------------------|
| Enter the length required |
| N = No requirement        |

| Cable Entry             |
|-------------------------|
| T = Top                 |
| B = Bottom              |
| M = Both top and bottom |

## Ordering Example:

GPX09R-1CW1-4TNN 2000\*840\*300,Cold-rolled steel, White, 144 Cores patch panel, 4 Patch panels, Top cable entry, No protection tubes, No cable inlet.

**Note :** \*If the required type of any item is not on the relevant list, please use "O" or "OO" as the red cells indicate, and kindly state the required type in the description of PO.

